




altro.com

Designed for possibilities.
Made for people.



Altro Wood

safety flooring collection



altro

Altro Wood adhesive-free



500 x 100mm

Frosted Oak | AFW280001
WR335 / A1M335 / LRV 52



500 x 100mm

Champagne Oak | AFW280010
WR338 / A1M338 / LRV 38




500 x 100mm

Summer Oak | AFW280005
WR340 / A1M340 / LRV 37



500 x 100mm

Caramel Oak | AFW280006
WR353 / A1M225 / LRV 25

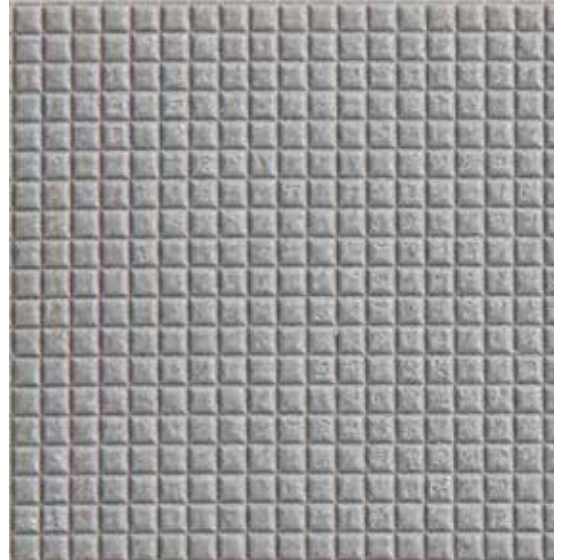

Altro adhesive-free flooring - swatch above shows underside emboss of Altro Wood adhesive-free.

For areas where the ability to easily remove, reuse or recycle post-installation plays an important part in your requirements for sustainable flooring finishes.



1000 (650/450) x 100mm

Honey Maple | AFW280011
WR352 / A1M352 / LRV 27



1000 (650/450) x 100mm

Soft Maple | AFW280002
WR339 / A1M339 / LRV 24



1000 (650/450) x 100mm

Shaded Cherry | AFW280004
WR337 / A1M337 / LRV 17



1000 (650/450) x 100mm

Imperial Walnut | AFW280009
WR341 / A1M160 / LRV 15



500x100mm

Timeless Oak | AFW280007
WR347 / A1M347 / LRV 38



1000 (550/450) x 100mm

Dusky Cherry | AFW280003
WR336 / A1M239 / LRV 22



1000 x 125mm

Vintage Oak | AFW280012
WR322 / A1M239 / LRV 19



500 x 100mm

Pitch Oak | AFW280008
WR348 / A1M348 / LRV 7

Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value
Light reflectance values measured in accordance with BS 8493:2008.
Exact material match with samples cannot be guaranteed.



Altro Wood



Design as shown

Washed Bamboo | WSA2020
WR463 / A1M392 / LRV 42



1000 (550/450) x 100mm

Farmhouse Oak | WSA2004
WR338 / A1M338 / LRV 38



1000 x 125mm

Ranch Oak | WSA2021
WR335 / A1M335 / LRV 51



500 x 100mm

Bleached Oak | WSA2001
WR335 / A1M335 / LRV 52



333 x 62mm

Light Beech | WSA2017
WR462 / A1M462 / LRV 43



500 x 100mm

Oak Traditions | WSA2013
WR353 / A1M225 / LRV 25



500 x 100mm

Rustic Oak | WSA2006
WR340 / A1M340 / LRV 37



1000 (550/450) x 100mm

Spring Maple | WSA2018
WR352 / A1M352 / LRV 27

Please note: The measurements stated next to each sample are the size of the plank(s) within the 2m x 20m sheet.
All information is correct at the time of print and is subject to change without prior notice.





500 x 100mm

Washed Oak | WSA2015
WR347 / A1M347 / LRV 38



1000 (550/450) x 100mm

Vintage Cherry | WSA2002
WR336 / A1M239 / LRV 22



1000 x 125mm

Worn Oak | WSA2023
WR322 / A1M239 / LRV 19



500 x 100mm

Manor Oak | WSA2016
WR348 / A1M348 / LRV 7



1000 (550/450) x 100mm

Autumn Maple | WSA2005
WR339 / A1M339 / LRV 24



1000 x 125mm

Mountain Oak | WSA2022
WR339 / A1M339 / LRV 22



1000 (550/450) x 100mm

Urban Cherry | WSA2003
WR337 / A1M337 / LRV 17



1000 (550/450) x 100mm

Walnut Noir | WSA2011
WR345 / A1M62 / LRV 6



1000 x 166mm

Noble Oak | WSA2024
WR467 / A1M467 / LRV 17



Design as shown

Deep Bamboo | WSA2019
WR342 / A1M224 / LRV 21



1000 (550/450) x 100mm

Antique Walnut | WSA2007
WR341 / A1M160 / LRV 15



1000 x 166mm

Stately Oak | WSA2025
WR468 / A1M62 / LRV 10

Altro Wood Comfort



1000 x 125mm

Reclaimed Oak | WSASC2821
WR335 / A1M335 / LRV 51



500 x 100mm

Soft Oak | WSASC2804
WR338 / A1M338 / LRV 38



Design as shown

Light Bamboo | WSASC2820
WR463 / A1M392 / LRV 42



500 x 100mm

Field Oak | WSASC2806
WR340 / A1M340 / LRV 37



1000 (550/450) x 100mm

Warm Maple | WSASC2805
WR339 / A1M339 / LRV 24



1000 (550/450) x 100mm

Deep Cherry | WSASC2803
WR337 / A1M337 / LRV 17



1000 x 125mm

Veteran Oak | WSASC2822
WR339 / A1M339 / LRV 22



1000 (550/450) x 100mm

Classic Walnut | WSASC2807
WR341 / A1M160 / LRV 15



500x100mm

Aged Oak | WSASC2815
WR347 / A1M347 / LRV 38



1000 (550/450) x 100mm

Antique Cherry | WSASC2802
WR336 / A1M239 / LRV 22



1000 x 125mm

Royal Oak | WSASC2823
WR322 / A1M239 / LRV 19



1000 x 166mm

Regent Oak | WSASC2825
WR468 / A1M62 / LRV 10





Altro Wood | 13 | debolon dessauer bodenbeläge
 GmbH & Co. KG, Ebertallee 209, 06846 Dessau-Roßlau |
 DIN EN 13845 | DoP-No. Altro Wood Safety-RN-A025 |
 Reaction to fire: Bfl s1 | Slip resistance: DS | Formaldehyde: E1 |
 Electrical behaviour: < 2 kV | EN 14041:2004/AC:2006 | 1658 |
 Resilient floor covering to be used within a building

Altro Wood Comfort | 17 | debolon dessauer bodenbeläge
 GmbH & Co. KG, Ebertallee 209, 06846 Dessau-Roßlau |
 EN 651 | DoP-No. R 200.1 Silence-RN-D029 |
 Reaction to fire: Cfl s1 | Slip resistance: DS |
 Formaldehyde: E1 | EN 14041:2004/AC:2006 | 1658 |
 Resilient floor covering to be used within a building

Altro Wood adhesive-free | 20 | debolon dessauer bodenbeläge
 GmbH & Co. KG, Ebertallee 209, D-06846 Dessau-Roßlau |
 EN 651 | DoP-No. RN-A034 | Reaction to fire: Cfl-s1 |
 Slip resistance: DS | Formaldehyde: E1 |
 Electrical behaviour: EN 1815 < 2 kV | EN 14041:2004/AC:2006 | 1658 |
 Resilient floor covering to be used within a building



*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

Sustainability



†A+ BRE generic green guide rating for resilient flooring, full details available at www.thegreenguide.org.uk

Installation and maintenance

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance. Technical information on installation and staining can be found at www.altro.com

Altro, Designed for possibilities. Made for people. Altro Wood, Altro Wood Comfort, Altro Wood adhesive-free and Altro Easyclean technology are trademarks of Altro Limited.

United Kingdom

+44 (0) 1462 707 700


enquiries@altro.com

Australia

+61 3 9764 5666

info@asf.com.au

Subject to alteration.

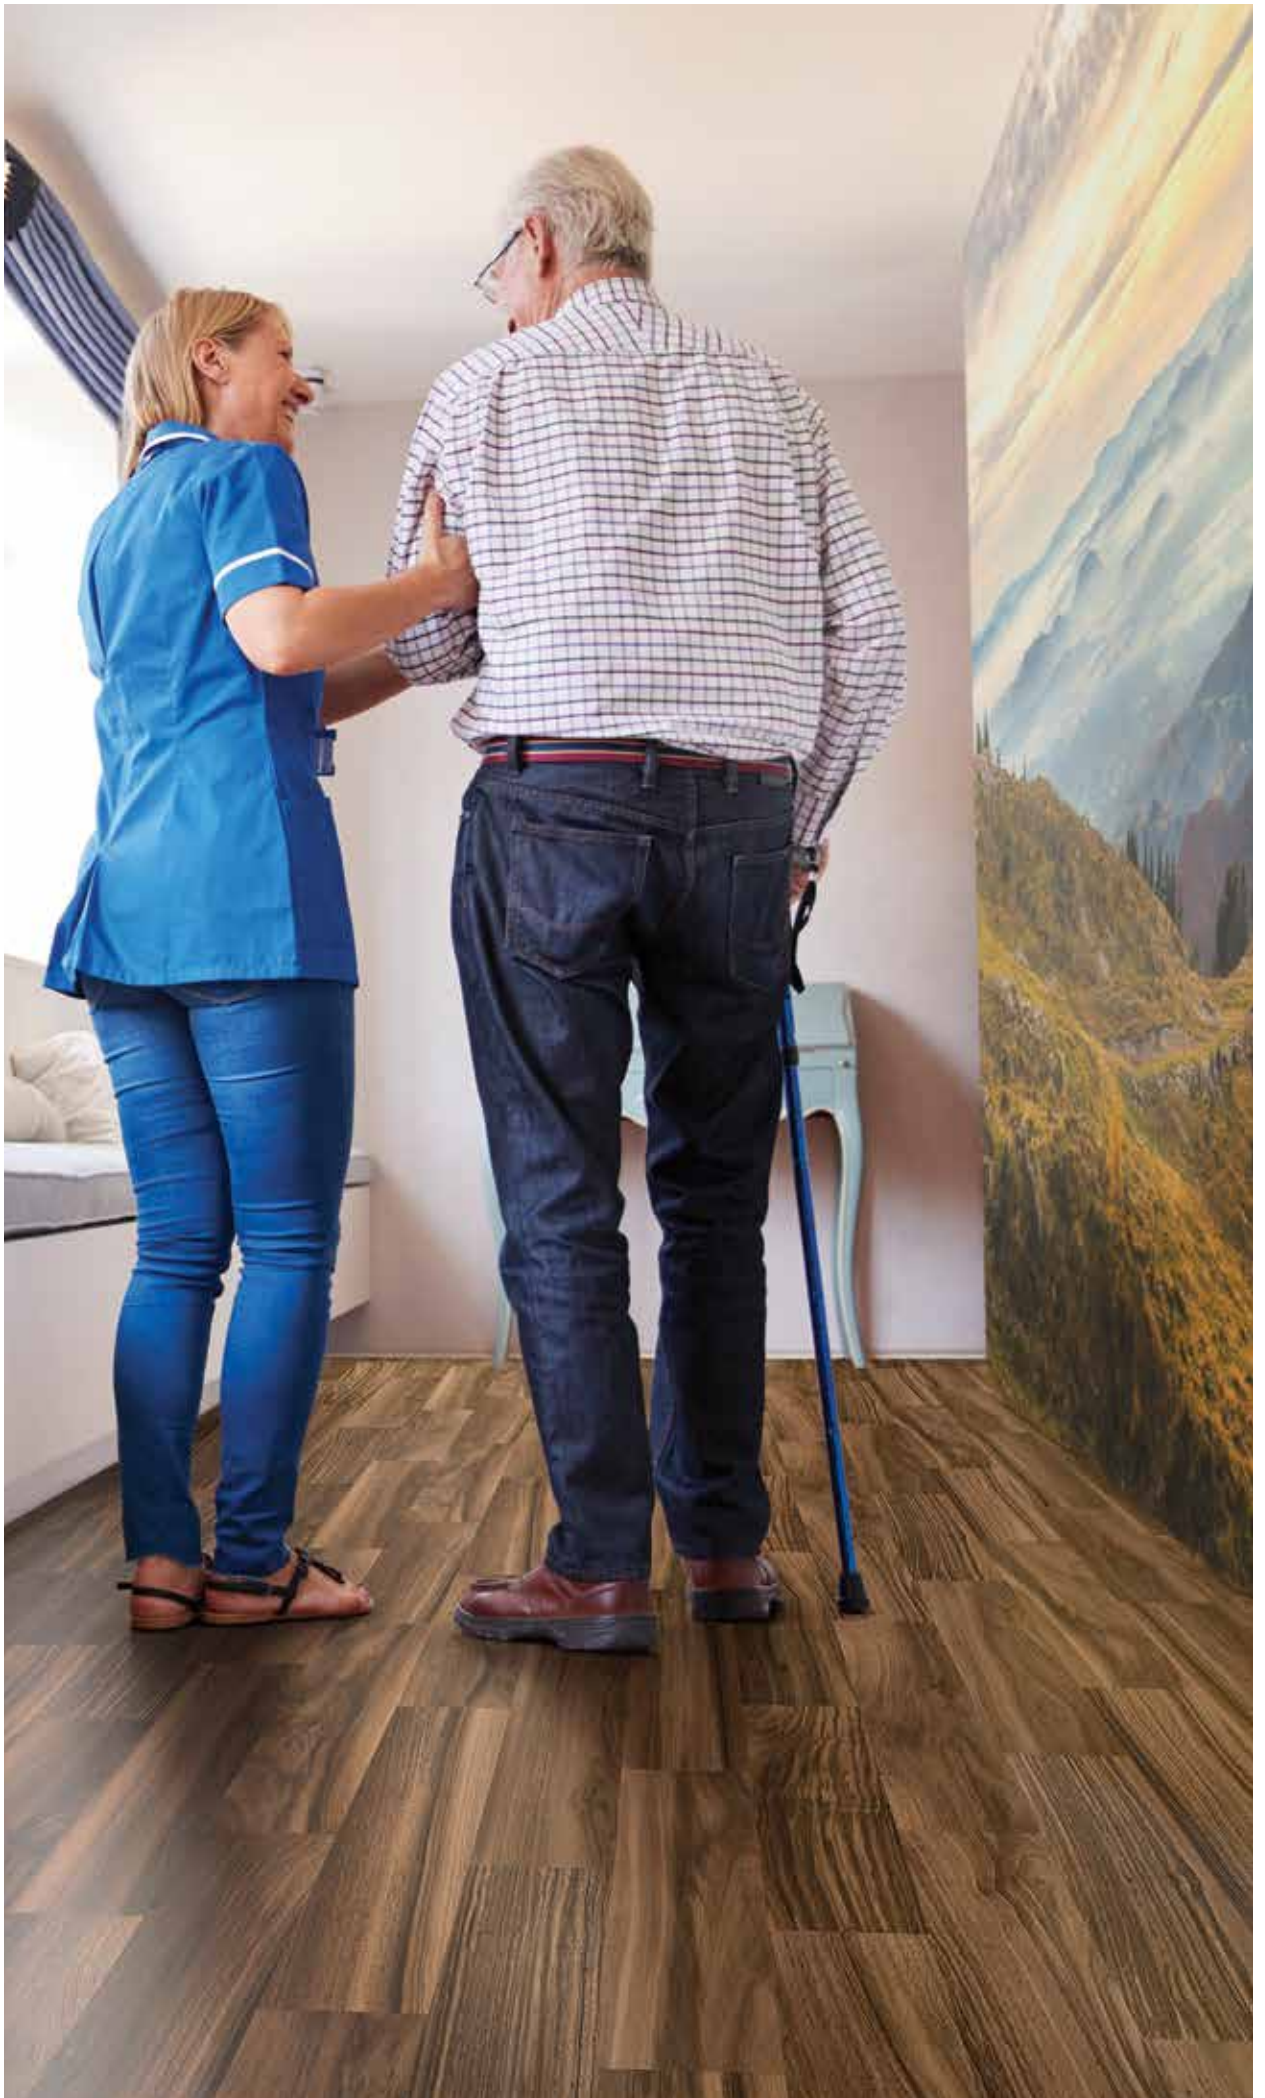








Typical applications

Altro Wood™ adhesive-free - bedrooms in care homes and hotels. Reception areas in care homes and kindergartens. Corridors, general circulation and public areas in hospitals, care homes, kindergartens and schools. Wards, waiting and treatment rooms in hospitals and care homes. As an alternative to LVTs in student accommodation. Common room / staff rooms in schools. Café / dining areas.

Altro Wood™ - hospital / care home corridors. Hospital / care home living areas. Patient rooms. Retail. Kindergartens, schools, universities: general circulation areas, corridors.

Altro Wood™ Comfort - corridors and classrooms in schools, kindergartens, universities. Student accommodation. Hospital / care home corridors and patient rooms. Retail. Home adaptations / social housing.

Technical information

Altro Wood			
	Fire behaviour tested in acc. with	EN ISO 9239-1 EN ISO 11925-2 EN 13501-1	≥ 8 kW/m ² Pass B _f -s1
	Slip resistance	EN 13893 PTV DIN 51130 / BGR 181 EN 13845 Annex C	≥ 0.30 / DS ≥ 36 R10 ESf
	Sound insulation	EN ISO 10140	ca. 4 dB
	Flooring type	EN 13845	Safety flooring
	Thickness	EN ISO 24346	2 mm
	Wear layer thickness	EN ISO 24340	0.7 mm
	Roll dimensions	EN ISO 24341	2 m x 20 m = 40 m ²
	Weight	EN ISO 23997	2.66 kg/m ²
	Residual indentation	EN ISO 24343-1	≤ 0.10 mm
	Classification for use	EN ISO 10874	34, 43
	Flexibility	EN ISO 24344	Pass
	Light fastness	EN ISO 105-BO2	≥ 6
	Castor chair abrasion	EN 425	Yes, type W
	Wear resistance	EN 660-2	Group T
	Chemical resistance	EN ISO 26987	Good
	Under floor heating	EN 12524	Suitable
	Electrical behaviours	EN 1815	≤ 2 kV, antistatic
	VOC emissions	CDPH 1350 / Floorscore Indoor Air Comfort Gold	Approved Approved

Altro Wood adhesive-free and Altro Wood Comfort

	Fire behaviour tested in acc. with	EN ISO 9239-1 EN ISO 11925-2 EN 13501-1	≥ 4.5 kW/m ² Pass C _f -s1
	Slip resistance	EN 13893 PTV DIN 51130 / BGR 181 EN 13845 Annex C	≥ 0.30 / DS ≥ 36 R10 ESf
	Sound insulation	EN ISO 10140	ca. 14 dB
	Flooring type	EN 651	Safety flooring
	Thickness	EN ISO 24346	Altro Wood adhesive-free - 2.4 mm Altro Wood Comfort - 2.85 mm
	Wear layer thickness	EN ISO 24340	0.7 mm
	Roll dimensions	EN ISO 24341	2 m x 20 m = 40 m ²
	Weight	EN ISO 23997	Altro Wood adhesive-free - 2.4 kg/m ² Altro Wood Comfort - 2.73 kg/m ²
	Residual indentation	EN ISO 24343-1	≤ 0.20 mm
	Classification for use	EN ISO 10874	34, 42
	Flexibility	EN ISO 24344	Pass
	Light fastness	EN ISO 105-BO2	≥ 6
	Castor chair abrasion	EN 425	Yes, type W
	Wear resistance	EN 660-2	Group T
	Chemical resistance	EN ISO 26987	Good
	Under floor heating	EN 12524	Suitable
	Electrical behaviours	EN 1815	≤ 2 kV, antistatic
	VOC emissions	CDPH 1350 / Floorscore Indoor Air Comfort Gold	Approved Approved