




Altro Impressionist™ II / IP20



Arctic | IP2012
WR11 / A1M11 / LRV 49

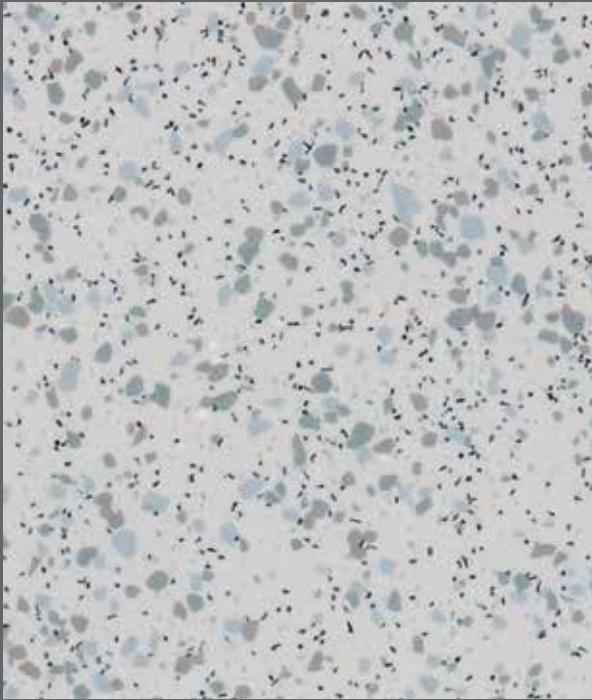

Mineral | IP2003
WR83 / A1M83 / LRV 14




Ebony | IP2001
WR100 / A1M100 / LRV 6



Typical applications

A versatile product. Please check with us for guidance with your specific high slip-risk project requirements.

Technical information

| | | | |
|---|------------------------------------|--|---|
|  | Fire behaviour tested in acc. with | EN ISO 9239-1 EN ISO 11925-2 EN 13501-1 | ≥ 8kW/m ² Pass B _{f1} -s1 |
|  | Slip resistance | EN 13893 PTV EN 13845 Annex C DIN 51130 / BGR 181 | ≥ 0.30 / DS ≥ 36 ESf R10 |
|  | Sound insulation | EN ISO 140-8 | ca. 5 dB |
|  | Flooring type | EN 13845 | Safety flooring |
|  | Thickness | EN ISO 24346 | 2 mm |
|  | Wear layer | EN ISO 24340 | 2 mm |
|  | Roll dimensions | EN ISO 24341 | 2 m x 20 m = 40 m ² |
|  | Weight | EN ISO 23997 | 2.6 kg/m ² |
|  | Indentation | EN ISO 24343-1 | ≤ 0.10 mm |
|  | Classification for use | EN ISO 10874 | 34, 43 |
|  | Flexibility | EN ISO 24344 | Pass |
|  | Light fastness | EN ISO 105-B02 | ≥ 6 |
|  | Castor chair abrasion | EN 425 | Good |
|  | Wear resistance | EN 13845 Annex D | ≤ 10% particles lost over 50000 cycles |
|  | Chemical resistance | EN ISO 26987 | Good |
|  | Under floor heating | EN 12524 | Suitable |
|  | Electrical behaviours | EN 1815 | ≤ 2 kV Antistatic |
|  | VOC emissions | CDPH 1350 / Floorscore | Approved |



07 | Altro Limited, Works Road, Letchworth Garden City, Hertfordshire, SG6 1NW, UK | EN 13845 | DoP-No. 1003 | Reaction to fire Bfl-s1 | Slip Resistance: DS | EN 14041:2008 | 0120 Resilient floor covering to be used within a building



*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

Sustainability



*A+ BRE generic green guide rating for resilient flooring, full details available at www.thegreenguide.org.uk

Installation and maintenance

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance. Technical information on installation and staining can be found at www.altro.com

Light Reflectance Values measured in accordance with BS 8493:2008. Exact material match with samples cannot be guaranteed.

Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value

 Altro, Altro Impressionist and Altro Easyclean technology are trademarks of Altro Limited.

United Kingdom

+44 (0) 1462 707 700

enquiries@altro.com

Australia

+61 3 9764 5666

info@asf.com.au